

DriPak[®] KX

RIGID POCKET FILTER

Features and Benefits

- ISO 16890: Coarse and ePM10
- Stiff welded pockets
- Pocket spacers for optimized airflow
- Fully incinerable
- High dust holding capacity
- Low pressure drop behaviour
- Non-breaking, synthetic fibres
- Silicone free
- Low weight and leak-proof design

Applications

DriPak KX filters are designed for the use in applications where a high dust holding capacity is crucial, either as prefilters or final filters.

DriPak KX filters are ideal for automotive paint booths, healthcare facilities, commercial buildings, and a variety of industrial applications.




Eurovent certification is not applicable to DriPak KX Coarse filters.

Configurations

Filter media	Synthetic
Pocket design	Z-shaped spacers, tapered, ultrasonic welded
Gasket	Optional
Header standard material	Plastic 25 mm
Max. operating temperature	70 °C
Recom. final pressure drop	Subject to optimization of lifecycle costs, max 450 Pa
Recom. airflow range	75% - 125% (of nominal airflow)
Moisture resistance	100% relative humidity
Standard dimensions (Width x Height)	592 x 592 mm with 8 pockets, 287 x 592 mm with 4 pockets

DriPak® KX Filter

Performance ISO Coarse 80% and ePM10 50% with 8 pockets

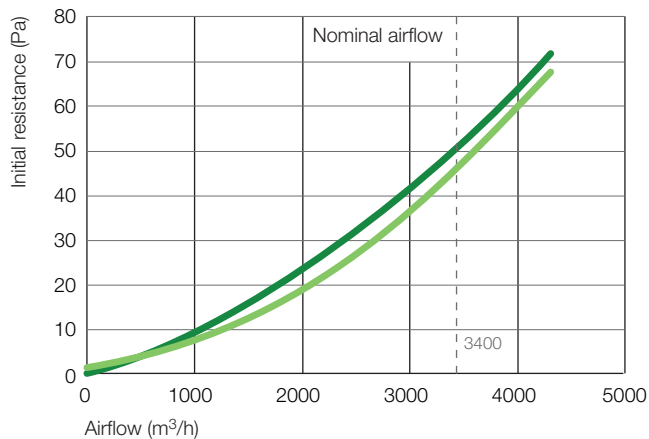

DriPak KX - Coarse 80% 592x592x535/8 pockets /ePM10 50% 592x592x635/8 pockets

Technical data

Filter name	Dimensions (mm) 592 x 592 x Depth	Filter area (m²)	Number of pockets	Initial dp (Pa) @ 3400 m³/h	Prev. rated EN779:2012	Acc. to Eurovent 4/21:2018		ISO 16890 Classification	Average values		
						kWh	Energy Rating		ePM1 (%)	ePM2,5 (%)	ePM10 (%)
DriPak KX Coarse 80%	635	5,8	8	45	M5	n/a	n/a	Coarse 80%	-	-	-
DriPak KX ePM10 50%	635	5,8	8	50	M6	620	B	ePM10 50%	4	10	53

NOTE: DriPak KX Coarse filters are not certified according to Eurovent.

DriPak® is a registered trademark of AAF International in the U.S. and other countries.



Bringing clean air to life.®

AAF International
European Headquarters

Odenwaldstrasse 4, 64646 Heppenheim
Tel: +49 (0)6252 69977-0
aafeurope.com

Specifications and performance data contain average values within existing production specification tolerances and are subject to change without prior notice. AAF explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this information.

©2023 AAF International and
its affiliated companies.
PF_304_EN_052023