

DriPak[®] SX

POCKET FILTER

Features and Benefits

- ISO16890: ePM10, ePM2,5 and ePM1
- Innovative design with specially designed tapered pockets for optimum airflow
- Reduced pressure drop for lower energy use

Applications

The air filter is designed for installation as pre- or final filtration in general air handling units for commercial and industrial applications.




Configurations

Filter media	Synthetic
Pocket design	Stitched, tapered - proprietary AAF Design
Gasket	Optional
Header standard material	Galvanized Steel 25 mm. Optional: Galvanized Steel 20 mm, Plastic 25 mm
Max. Operating Temperature	70 °C
Recom. final pressure drop	Subject to optimization of lifecycle costs, max 450 Pa
Recom. airflow range	75% - 125% (of nominal airflow)
Moisture resistance	100% relative humidity


Standard dimensions (Width x Height)

Dimension	592 x 592	490 x 592	287 x 592	592 x 490	592x287	287 x 287
Depth	635 + 525 + 360					
# Pockets	6 + 8	5 + 6	3 + 4	6	6	3
Frame	Metal					

Performance DriPak SX ePM10 70% with 6 and 8 pockets

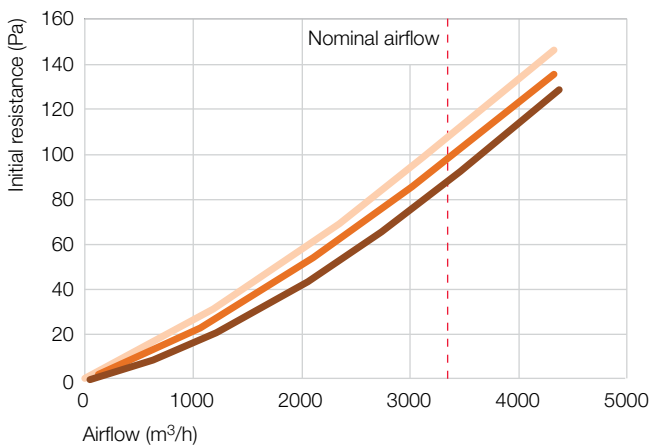

DriPak SX - ePM10 70% 592x592x360/6 pockets / ePM10 70% 592x592x525/6 pockets / ePM10 70% 592x592x635/6 pockets

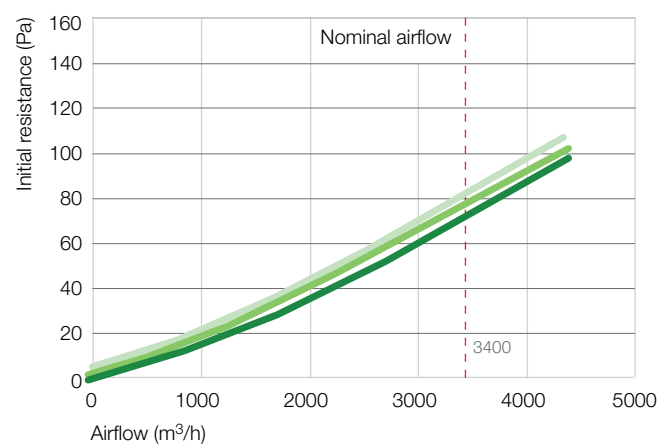


DriPak SX - ePM10 70% 592x592x360/8 pockets / ePM10 70% 592x592x525/8 pockets / ePM10 70% 592x592x635/8 pockets




Bringing clean air to life.®

DriPak[®] SX Filter

Performance ePM_{2,5} 65% with 6 and 8 pockets

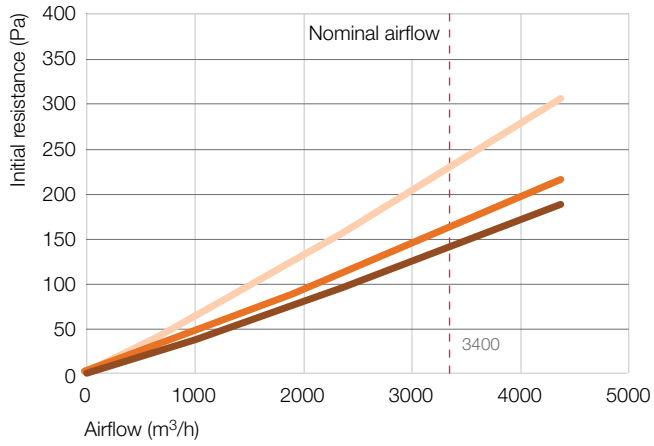


DriPak SX - ePM_{2,5} 65% 592x592x360/6 pockets / ePM_{2,5} 65% 592x592x525/6 pockets / ePM_{2,5} 65% 592x592x635/6 pockets

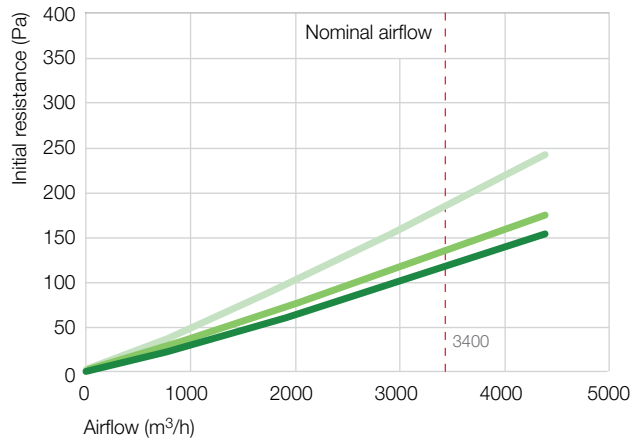


DriPak SX - ePM_{2,5} 65% 592x592x360/8 pockets / ePM_{2,5} 65% 592x592x525/8 pockets / ePM_{2,5} 65% 592x592x635/ 8 pockets

Performance ePM₁ 60% with 6 and 8 pockets

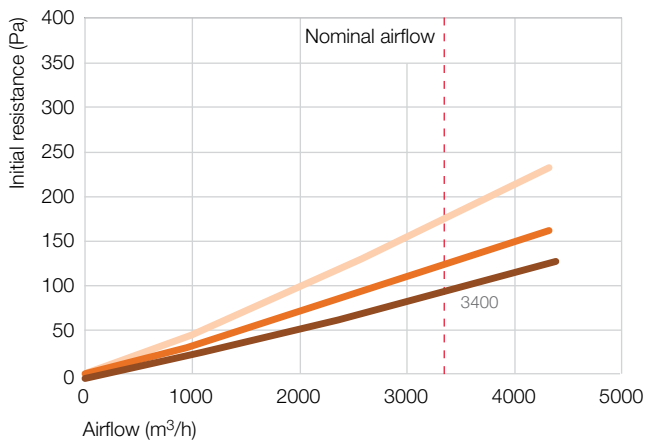

DriPak SX - ePM₁ 60% 592x592x360/6 pockets / ePM₁ 60% 592x592x525/6 pockets / ePM₁ 60% 592x592x635/6 pockets

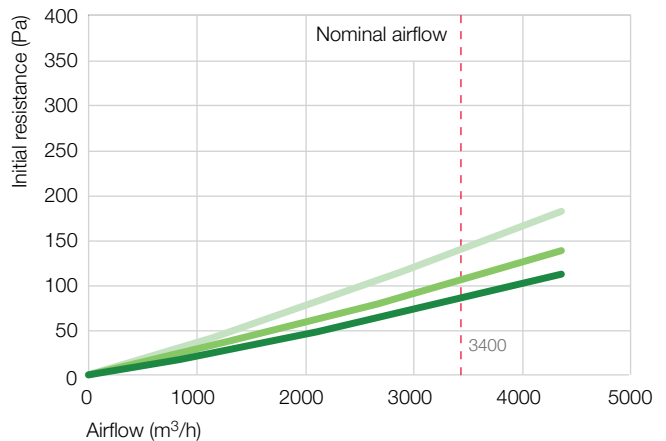

DriPak SX - ePM₁ 60% 592x592x360/8 pockets / ePM₁ 60% 592x592x525/8 pockets / ePM₁ 60% 592x592x635/ 8 pockets

DriPak® SX Filter

Technical data

Filter name	Dimensions (mm) 592 x 592 x depth	Filter area (m ²)	Number of pockets	Initial dp (Pa) @ 3400 m ³ /h	Prev. rated EN779:2012	Acc. to Eurovent 4/21:2018		ISO 16890 Classification	Average values		
						kWh	Energy Rating		ePM1 (%)	ePM2,5 (%)	ePM10 (%)
DriPak SX ePM10 70%	635	4,3	6	90	M6	> 1300	E	ePM10 70%	30	45	72
	525	3,6	6	100	M6	> 1300	E	ePM10 70%	30	45	72
	360	2,4	6	110	M6	> 1300	E	ePM10 70%	30	45	72
DriPak SX ePM10 70%	635	5,8	8	70	M6	> 1300	E	ePM10 70%	30	45	72
	525	4,7	8	75	M6	> 1300	E	ePM10 70%	30	45	72
	360	3,2	8	80	M6	> 1300	E	ePM10 70%	30	45	72
DriPak SX ePM2,5 65%	635	4,3	6	144	F7	> 1950	E	ePM2,5 65%	50*	65	84
	525	3,6	6	167	F7	> 1950	E	ePM2,5 65%	50*	65	84
	360	2,4	6	236	F7	> 1950	E	ePM2,5 65%	50*	65	84
DriPak SX ePM2,5 65%	635	5,8	8	115	F7	1680	D	ePM2,5 65%	50*	65	84
	525	4,7	8	132	F7	> 1950	E	ePM2,5 65%	50*	65	84
	360	3,2	8	184	F7	> 1950	E	ePM2,5 65%	50*	65	84
DriPak SX ePM1 60%	635	4,3	6	95	N/A	1550	D	ePM1 60%	61	71	91
	525	3,6	6	125	N/A	2000	D	ePM1 60%	61	71	91
	360	2,4	6	180	N/A	> 2050	E	ePM1 60%	61	71	91
DriPak SX ePM1 60%	635	5,8	8	85	N/A	1320	C	ePM1 60%	61	71	91
	525	4,7	8	105	N/A	1500	D	ePM1 60%	61	71	91
	360	3,2	8	140	N/A	> 2050	E	ePM1 60%	61	71	91

* Note: ePM1 min < 50%

Further dimensions are available on request. From January 1st 2018 filtration efficiency values are certified according to ISO 16890.

DriPak® is a registered trademark of AAF International in the U.S. and other countries.



Bringing clean air to life.

AAF International
European Headquarters
Odenwaldstrasse 4, 64646 Heppenheim
Tel: +49 (0)6252 69977-0
aafeurope.com

Specifications and performance data contain average values within existing production specification tolerances and are subject to change without prior notice. AAF explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this information.

©2024 AAF International and its affiliated companies.
PF_304_EN_082024